


SOLAS dual-switched driver. Versatile 12V LED driver.  
A compact, thin design, ideal for kitchen under cabinet lighting and other applications.

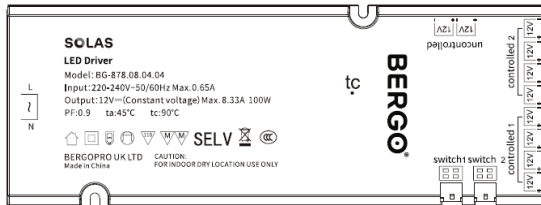

### Electromagnetic certification

Item	Country	Certified status	Standards
CE	European Union	Accord	EN61347-1:2015 EN IEC 55015: 2019/A11:2020

### Environmental conditions

Storage temperature range: -30° C ~ +70° C

Storage humidity: 10 ~ 90%

### Description

Usage: Wired switches:  
855/856/857/858/859/865 required

### Input

Voltage:	220-240 V <sub>AC</sub>
Frequency:	50/60 Hz
Current:	650 mA max
PF:	≥ 0.9

### Output

Parameter	Unit	Min	Average	Max	Remarks
Voltage	V <sub>oc</sub>	11.4	12	12.6	
Current	A	0		8.33	
Ripple and noise	mVp-p			240	20 MHz Bandwidth 47uF Ele. Cap and 0.1uF Cer. Cap.

### Item ID No.

Finish/Colour	Size (WxDxH) mm	Cat. No.
Black	202 x 75 x 15 mm	<b>BG-878.08.04.04</b>

