

SOLAS smart driver. Introducing a versatile device that enhances your LED system through its programmable wireless control.

### Electromagnetic certification

Item	Country	Certified status	Standards
CE	European Union	Accord	EN62368 - 1:2014



### Environmental conditions

**Storage temperature range:** -30° C ~ +70° C

**Storage humidity:** 10 ~ 90%

### Description


**Usage:** Control box: 881 required  
Wireless sensors: 860/861/862/863 required

### Input

**Voltage:** 220-240 V<sub>ac</sub>


**Frequency:** 50/60 Hz

**Current:** 800 mA

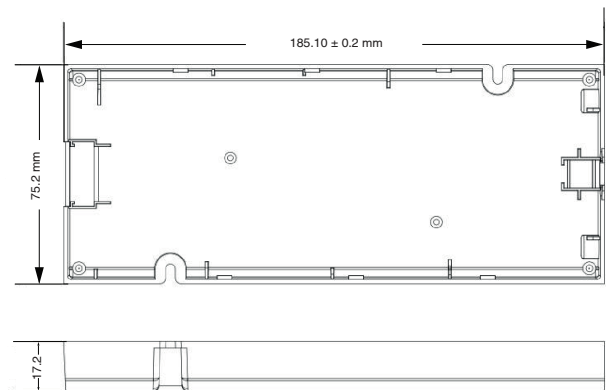

### Output

Parameter	Unit	Min	Average	Max	Remarks
Voltage	V <sub>dc</sub>	11.4	12	12.6	
Current	A	0		5	
Ripple and noise	mVp-p			200	20 MHz Bandwidth 47uF Ele Cap and 0.1uF Cer. Cap.

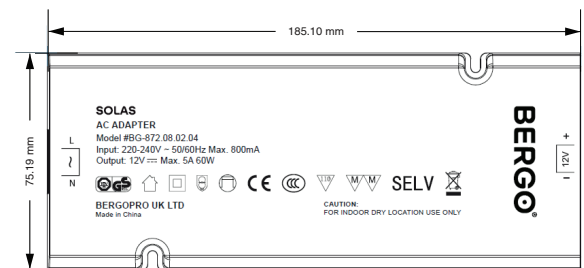

### Item ID No.

Finish/Colour	Size (WxDxH) mm	Cat. No.
Black	185 x 75 x 17 mm	BG-872.08.02.04

