

Solas switched driver. Versatile 12V LED driver. A compact, thin design, ideal for kitchen under cabinet lighting and other applications.



Electromagnetic certification

Item	Country	Certified status	Standards
CE	European Union	Accord	EN62368 - 1:2014

Environmental conditions

Storage temperature range:	-30° C ~ +70° C
Storage humidity:	10 ~ 90%

Description

Finish/Colour:	Black
Usage:	Wired sensors BG-856/857/858/859 required

Input




Voltage:	220 - 240 V _{ac}
Frequency:	50 / 60 Hz
Current:	800 mA

Output

Parameter	Unit	Min	Average	Max	Remarks
Voltage	V _{dc}	11.4	12	12.6	
Current	A	0		5	
Ripple and noise	mVp-p			200	20 MHz Bandwidth 47uF ele. Cap and 0.1uF Cer. Cap.

Item ID No.

6-Way Switched Driver- 60 W	Cat. No.
207 x 75.5 x 17 mm	BG-873.08.02.04

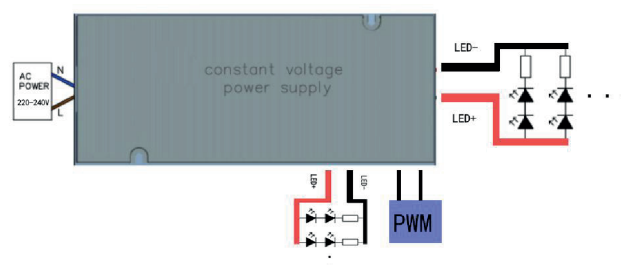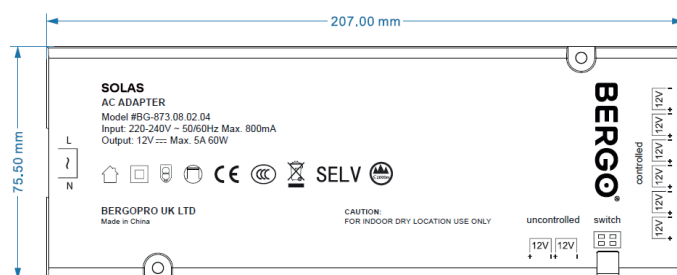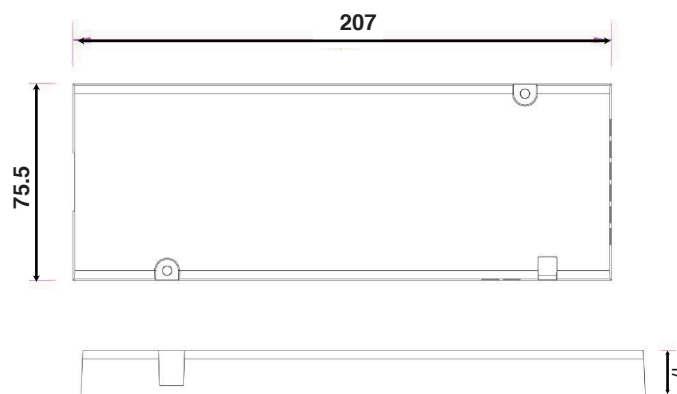

Solas Switched driver. Versatile 12V LED driver. A compact, thin design, ideal for kitchen under cabinet lighting and other applications.



Electromagnetic certification

Item	Country	Certified status	Standards
CE	European Union	Accord	EN62368 - 1:2014

Environmental conditions

Storage temperature range:	-30° C ~ +70° C
Storage humidity:	10 ~ 90%

Description

Finish/Colour:	Black
Usage:	Wired sensors BG-856/857/858/859 required

Input

Voltage:	220 - 240 V _{AC}
Frequency:	50 / 60 Hz
Current:	1200 mA

Output

Parameter	Unit	Min	Average	Max	Remarks
Voltage	V _{DC}	11.4	12	12.6	
Current	A	0		5	
Ripple and noise	mVp-p			200	20 MHz Bandwidth 47uF ele. Cap and 0.1uF Cer. Cap.

Item ID No.

6-Way Switched Driver - 90 W	Cat. No.
266.6 x 75.5 x 17 mm	BG-873.08.03.04

