



Products
Catalogue.


BRAND CATALOGUE 2026.01

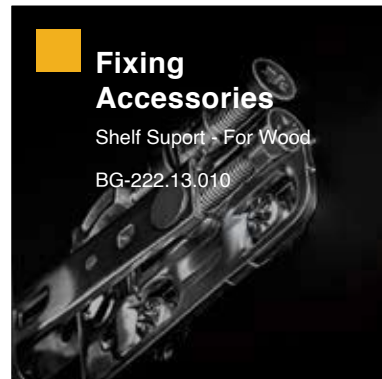

**Fixing
Accessories**
Shelf Support - For Wood
BG-222.13.010

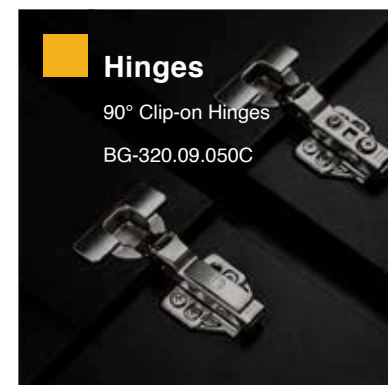

Hinges
90° Clip-on Hinges
BG-320.09.050C

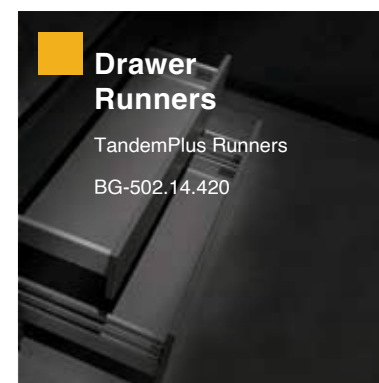

**Drawer
Runners**
TandemPlus Runners
BG-502.14.420

INTRODUCING BERGO ESSENTIALS

4 Years • 5 Countries

All BERGO subbrands,
together online

WHO WE ARE

BERGO PRO UK Limited is a British company specialising in building materials, with regional headquarters, BERGO PRO Building Materials Trading LLC, located in Dubai Industrial City (DIC), UAE.

A key player in the Gulf Cooperation Council (GCC) region, **BERGO PRO** is dedicated to delivering innovative B2B solutions tailored specifically to the needs of the furniture manufacturing, flooring and WPC markets including the **UAE, Qatar, Oman, Saudi Arabia, and Bahrain.**

MISSION & VISION

What sets BERGO PRO apart is our commitment to a demand-driven business model that focuses on initiative-taking research and development (R&D). This approach allows us to continuously introduce innovative products that grant our customers a competitive edge.

Moreover, our clearly defined strategy prioritises market-oriented solutions over conventional manufacturing methods, enabling us to address the specific architectural and furniture requirements of the GCC region.

Operating from our headquarters in Dubai, BERGO PRO manages dedicated teams across the GCC to ensure seamless service delivery. As we aim to expand our footprint into other Middle Eastern and North African (MENA) markets, we are actively seeking manufacturing partners and distributors to complement our existing relationships with direct customers.

Our vigilant monitoring of industry trends and emerging technologies ensures that we remain at the forefront of innovation, thus driving commercial success for all stakeholders involved.

The GCC represents a wealth of opportunities, and we foresee robust growth potential as we reinforce our presence in this dynamic market.

THE FOUNDATION OF MODERN INTERIORS

ESSENTIALS is BERGO's foundational range of furniture fittings essentials, developed to support everyday joinery and furniture applications with consistency and reliability. The range is intended to provide the core, frequently specified items that underpin practical furniture manufacture and fit-out work. ESSENTIALS is positioned as a core furniture fittings range, supporting BERGO's wider systems portfolio.

What ESSENTIALS Does

ESSENTIALS provides the baseline fittings layer across furniture applications, the dependable, repeatable elements that support daily functionality and project standardisation. It complements specialist BERGO systems by ensuring foundational fittings remain consistent across projects and applications.

Explore our complete collection on our website at www.bergopro.com

Regional Offices:
Warehouse L12, Phase 1, Dubai Industrial City, Dubai, UAE
☎ +971 4 564 2460 (landline) / 📞 +971 56 539 2001 (Mobile)
info@bergopro.com
www.bergopro.com

For International Enquiries:
info@bergopro.co.uk
www.bergopro.co.uk



Table of
Contents

Hinges	07
110° Clip-on Hinges-For Wood Doors	09
110° Clip-on Hinges-For Wood Doors	10
110° Clip-on Hinges-With Covers-For Wood Doors	11
165° Clip-on Hinges-For Wood Doors	12
90° Clip-on Hinges-For Wood Doors	13
90° Clip-on Hinges-For Wood Doors	14
90° Clip-on Hinges-With Covers-For Wood Doors	15
110° Clip-on Hinges-For Aluminium Doors	16
110° Clip-on Hinges-With Covers-For Aluminium Doors	17
165° Clip-on Hinges-For Aluminium Doors	18
110° Loose Clip-on Hinge-For Wood Doors	19
110° Loose Clip-on Hinge-With Covers-For Wood Doors	20
Drawer Runners	21
Ball Bearing Runners-Drawers Side Mount	23
Ball Bearing Runners-Drawers Side Mount	24
Ball Bearing Runners-Drawers Side Mount	25
Drawer Slides-Concealed	26
2D Drawer Slides-Concealed	27
2D Drawer Slides-Concealed	28
2D Push-to-Open Drawer Slides-Concealed	29
Drawer Set-TandemPlus Runners	30
Drawer Set-TandemPlus Runners	31
Drawer Set Single Rail Extension-TandemPlus Runners	32
Drawer Set Double Rail Extension-TandemPlus Runners	33
Drawer Set Single Rail Extension-TandemPlus Runners	34
Fixing Accessories & Other	35
Beech Wooden-Dowel	37
Shelf Support-For Glass	38
Shelf Support-For Wood	39
Shelf Support-For Wood	40
Thread Sleeve-With Screw	41
Thread Sleeve-With Screw	42
Spreading Bolt-For Wood	43
Connecting Bolt-For Wood	44
Connecting Housing-For Wood	45
Spreading Dowel-For Wood	46
Connector Housing With Bolt-For Wood	47
Push-to-Open Door Catch-With Counterplate	48
Push-to-Open Door Catch-With Counterplate	49
Push-to-Open Door Catch-Insert Type	50
Cabinet Hanger-For Kitchen Cabinets	51
Base Cabinet Leg-With Leg Adjuster	52
Cabinet Feet-Adjustable	53




Hinges

09	110° Clip-on Hinges-For Wood Doors
10	110° Clip-on Hinges-For Wood Doors
11	110° Clip-on Hinges-With Covers-For Wood Doors
12	165° Clip-on Hinges-For Wood Doors
13	90° Clip-on Hinges-For Wood Doors
14	90° Clip-on Hinges-For Wood Doors
15	90° Clip-on Hinges-With Covers-For Wood Doors
16	110° Clip-on Hinges-For Aluminium Doors
17	110° Clip-on Hinges-With Covers-For Aluminium Doors
18	165° Clip-on Hinges-For Aluminium Doors
19	110° Loose Clip-on Hinge-For Wood Doors
20	110° Loose Clip-on Hinge-With Covers-For Wood Doors


110° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Full overlay or half overlay mounting.




Full overlay mounting

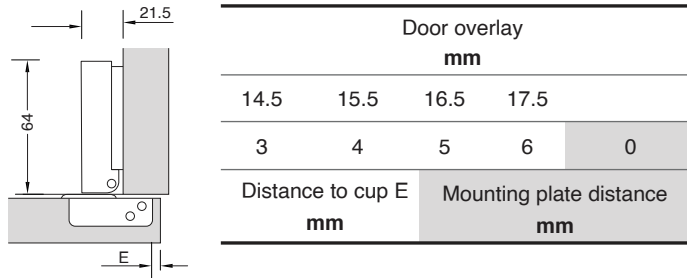

Half overlay mounting

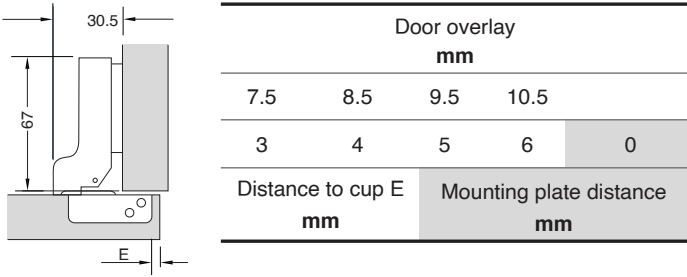

Height adjustment ±2 mm via eccentric

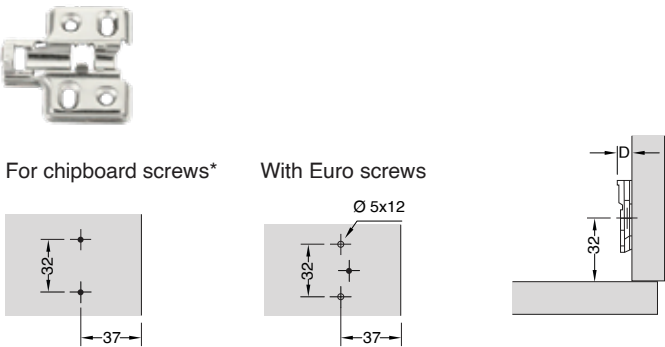

Hinge Plates



Item ID No.

Mounting plate type	Cat. No.
4-Hole wood doors*	BG-323.01.050
Aluminium doors**	BG-324.01.050

Description

Material:	Steel cup & hinge arm
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-22 mm
Drilling pattern:	48/6
Adjustment facility:	Side ± 1.5 mm Height ± 2 mm (via mounting plate) Depth from -1 to +3 mm

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-320.01.050
	Half overlay	BG-320.01.051

110° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Full overlay, half overlay, or inset mounting.





This mounting plate should be secured in place by an additional screw after the final adjustment is complete.

Description

Material:	Cold-rolled steel
Load rating:	Max 5Kg/Pair
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-21 mm
Door dims:	3-7 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-320.09.050
	Half overlay	BG-320.09.051
	Inset	BG-320.09.052
Gunmetal	Full overlay	BG-320.09.390
	Half overlay	BG-320.09.391
	Inset	BG-320.09.392

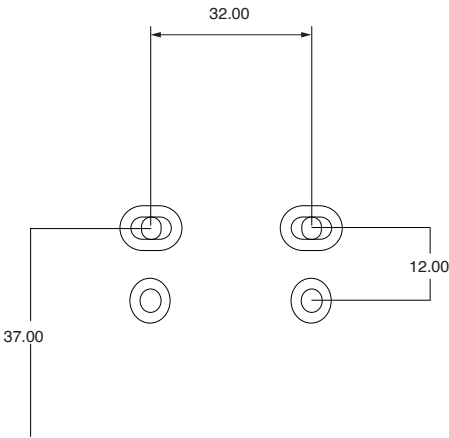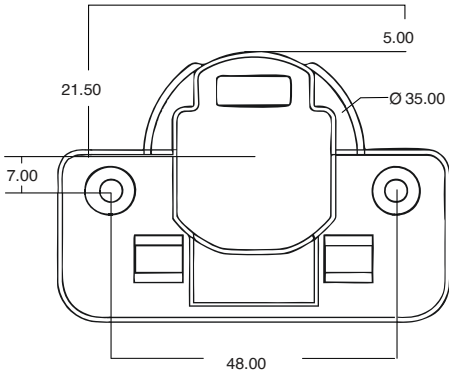

110° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Full overlay, half overlay, or inset mounting.





This mounting plate should be secured in place by an additional screw after the final adjustment is complete.

Description

Material:	Cold-rolled steel
Load rating:	Max 5Kg/Pair
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-21 mm
Door dims:	3-7 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm
Accessories:	Arm cover cap & cup cover cap

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-320.09.050C
	Half overlay	BG-320.09.051C
	Inset	BG-320.09.052C
Gunmetal	Full overlay	BG-320.09.390C
	Half overlay	BG-320.09.391C
	Inset	BG-320.09.392C

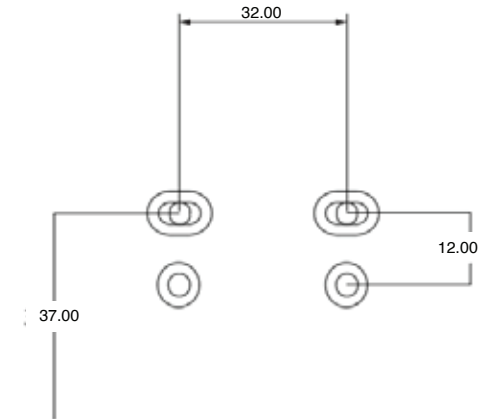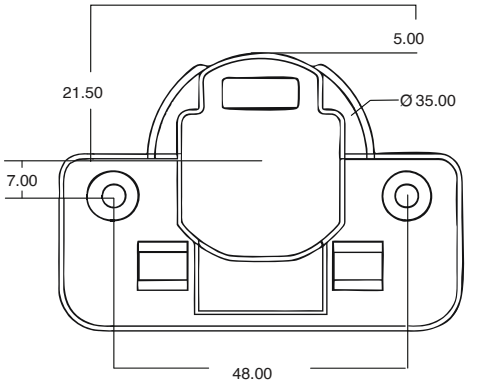

165° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Full overlay mounting.





Description

Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-26 mm
Door dims:	3-7 mm, suggestion 4-5 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-321.09.050

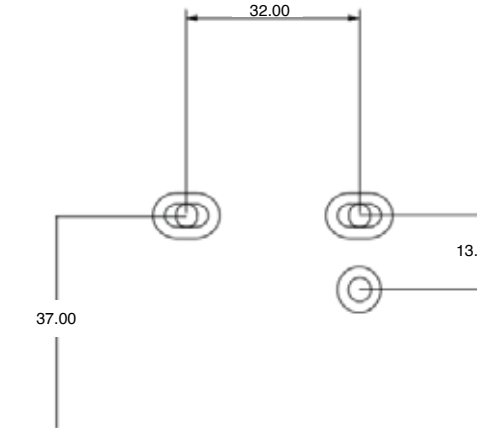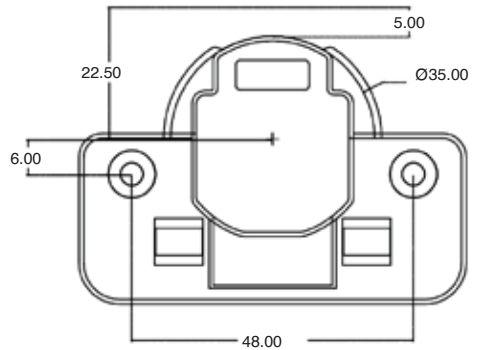

90° hinges with an integrated soft-close mechanism and mounting plate. Inset mounting.





Description



Material:	Cold-rolled steel
Hinge cup dia:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-21 mm
Door dims (K):	4-5 mm
Weight:	105 g

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Inset	BG-322.01.050

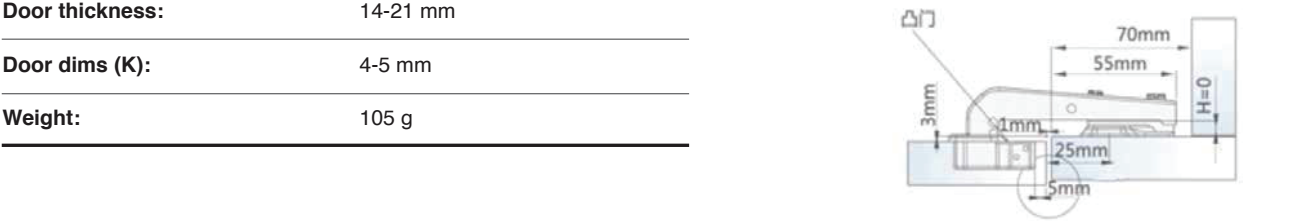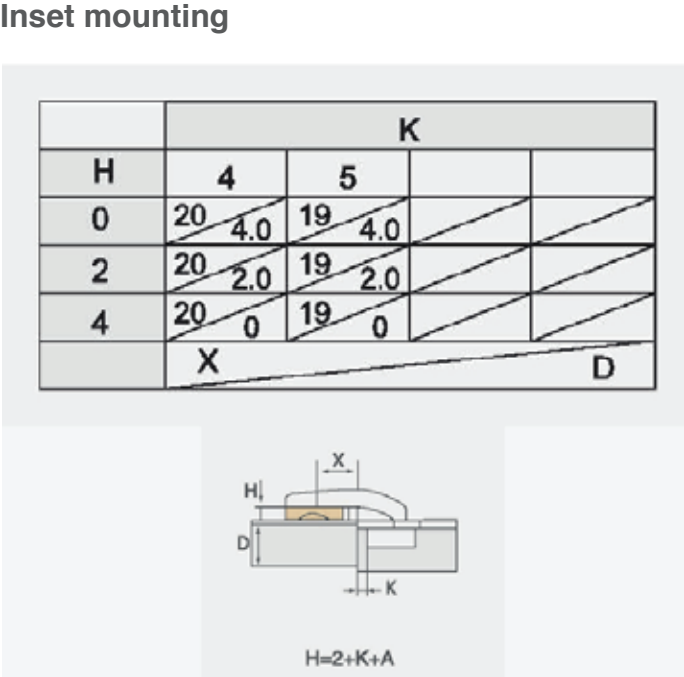

Options of screws & dowels

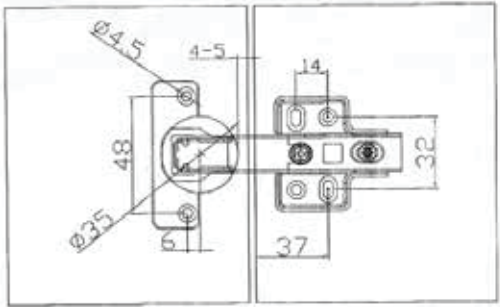

90° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Inset mounting.




Description


Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-26 mm
Door dims:	3-7 mm, suggestion 4-5 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Inset	BG-322.09.050

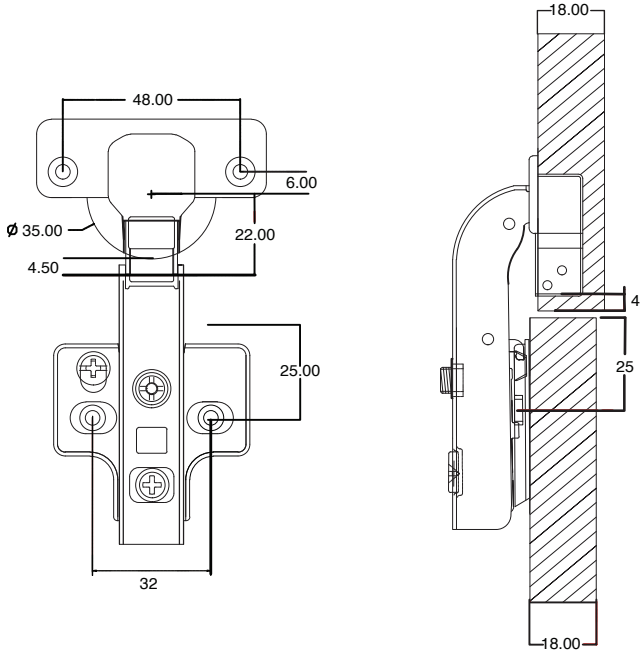

90° 3D-adjustable hinges with an integrated soft-close mechanism and mounting plate. Inset mounting.

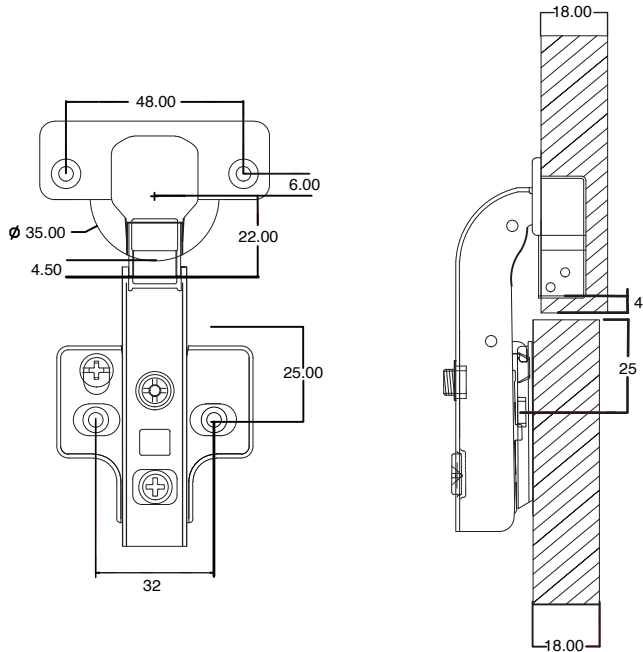


Description

Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-26 mm
Doors dims:	3-7 mm, suggestion 4-5 mm
Adjustment facility:	Side ± 1.9-2 mm
	Height ± 1.9-2 mm (via mounting plate)
	Depth from -1 to +3 mm
Accessories:	Arm cover cap & cup cover cap

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Inset	BG-322.09.050C

110° hinges with an integrated soft-close mechanism and mounting plate. Full overlay mounting.

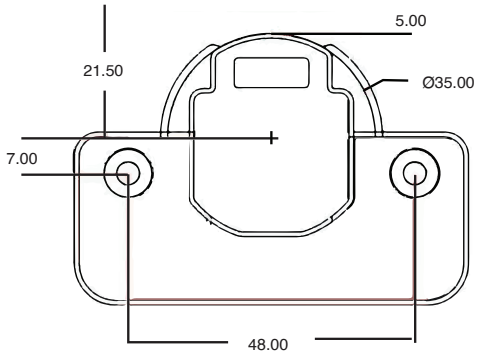


Description



Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	18 mm
Door dims:	3-7 mm, suggestion 4-5 mm
Weight:	95-96 g

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-325.09.050

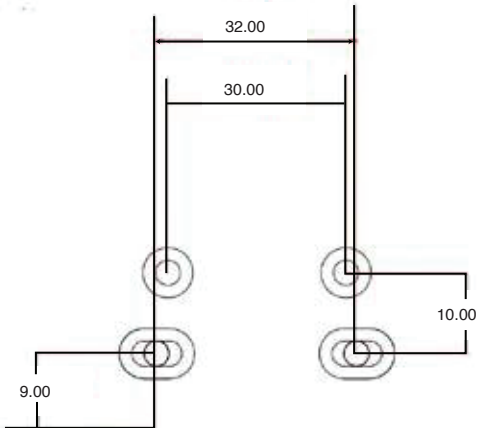

110° hinges with an integrated soft-close mechanism and mounting plate. Full overlay mounting.

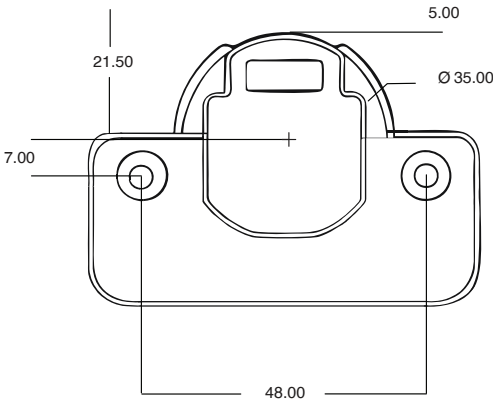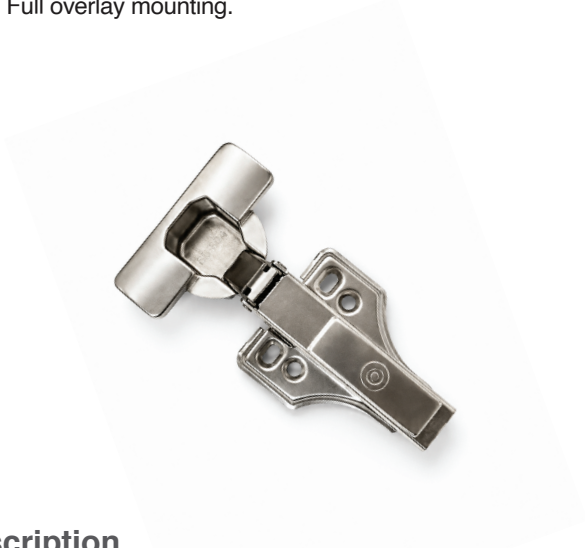


Description


Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	18 mm
Door dims:	3-7 mm, suggestion 4-5 mm
Weight:	95-96 g
Accessories:	Arm cover cap & cup cover cap

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-325.09.050C

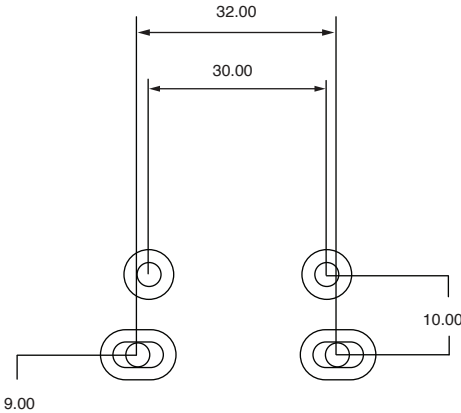

165° hinges with an integrated soft-close mechanism and mounting plate. Full overlay mounting.

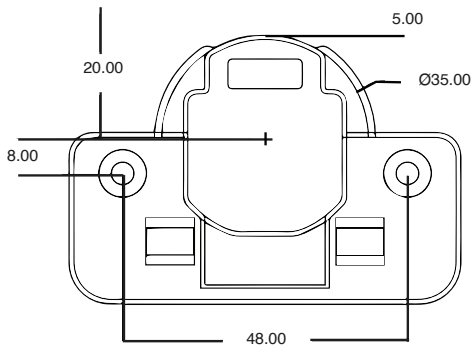


Description

Material:	Cold-rolled steel
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	16-21 mm
Door dims:	3-7 mm, suggestion 4-5 mm
Weight:	177 g

Item ID No.


Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-326.09.050

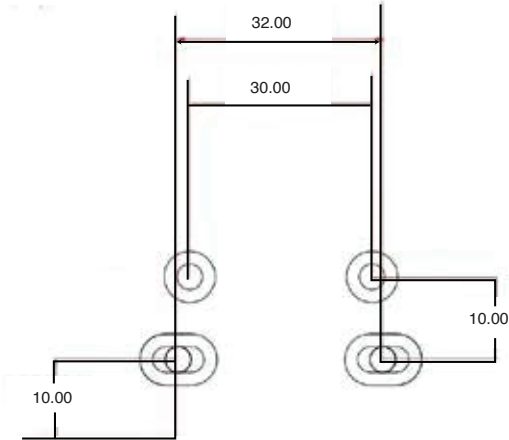

110° 3D-adjustable hinges and mounting plate. Full overlay mounting



This mounting plate should be secured in place by an additional screw after the final adjustment is complete.

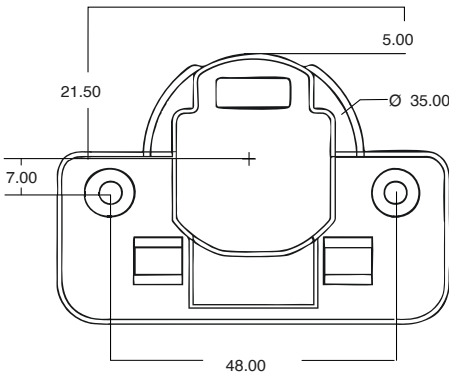


Description

Material:	Cold-rolled steel
Load rating:	Max 5Kg/Pair
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-21 mm
Door dims:	3-7 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm

Item ID No.


Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-329.09.050

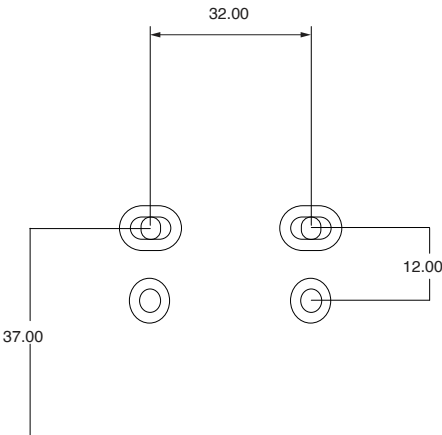

110° 3D-adjustable hinges and mounting plate. Full overlay mounting



This mounting plate should be secured in place by an additional screw after the final adjustment is complete.

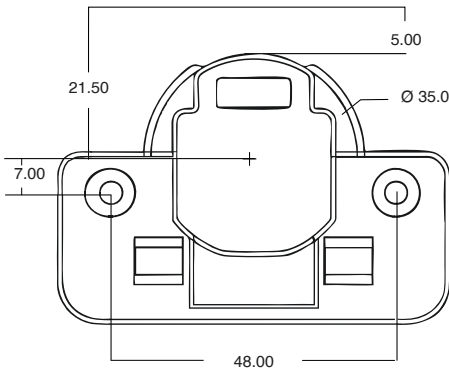


Description

Material:	Cold-rolled steel
Load rating:	Max 5Kg/Pair
Hinge cup dia.:	35 mm
Drilling depth:	11.5 mm
Door thickness:	14-21 mm
Door dims:	3-7 mm
Adjustment facility:	Side ± 1.9-2 mm Height ± 1.9-2 mm (via mounting plate) Depth from -1 to +3 mm
Accessories:	Arm cover cap & cup cover cap

Item ID No.

Finish/Colour	Type	Cat. No.
Nickel plated	Full overlay	BG-329.09.050C

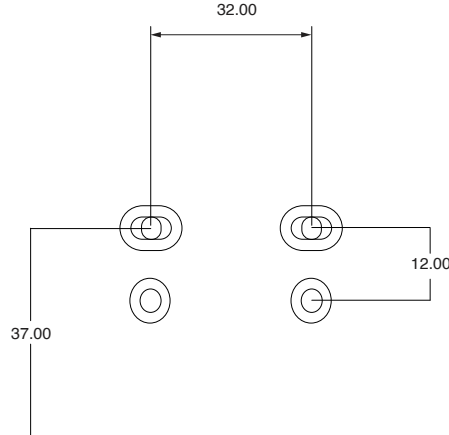


Drawer Runners

23	Ball Bearing Runners-Drawers Side Mount
24	Ball Bearing Runners-Drawers Side Mount
25	Ball Bearing Runners-Drawers Side Mount
26	Drawer Slides-Concealed
27	2D Drawer Slides-Concealed
28	2D Drawer Slides-Concealed
29	2D Push-to-Open Drawer Slides-Concealed
30	Drawer Set-TandemPlus Runners
31	Drawer Set-TandemPlus Runners
32	Drawer Set Single Rail Extension-TandemPlus Runners
33	Drawer Set Double Rail Extension-TandemPlus Runners
34	Drawer Set Single Rail Extension-TandemPlus Runners

Full-extension ball bearing runners with self-closing and soft-closing mechanism, supporting a load-bearing capacity of up to 35 kg.

Drilling Pattern

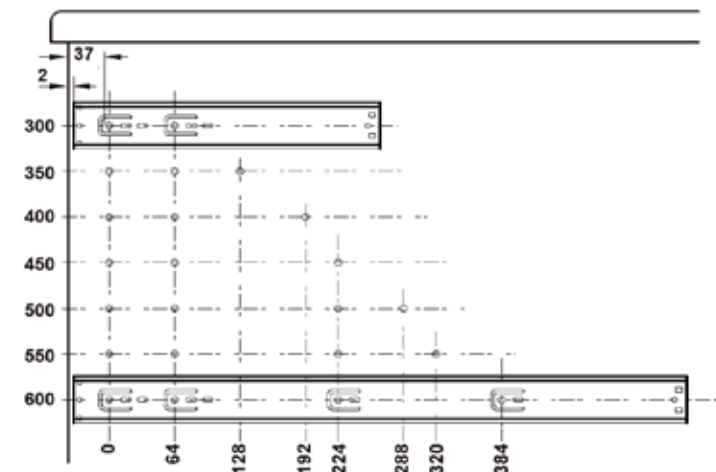


Description

Material:	Cold rolled steel
Version:	With integrated soft closing mechanism, cover caps at rear of cabinet rail and center rail with buffer action. Can be disengaged using release lever
Usage:	Drawers, side mount
Mechanism:	Soft close


Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Galvanized	250	250	Up to 35	BG-400.01.160
	300	300	Up to 35	BG-400.01.161
	350	350	Up to 35	BG-400.01.162
	400	400	Up to 35	BG-400.01.163
	450	450	Up to 35	BG-400.01.164
	500	500	Up to 35	BG-400.01.165
	600	600	Up to 35	BG-400.01.166

Installation

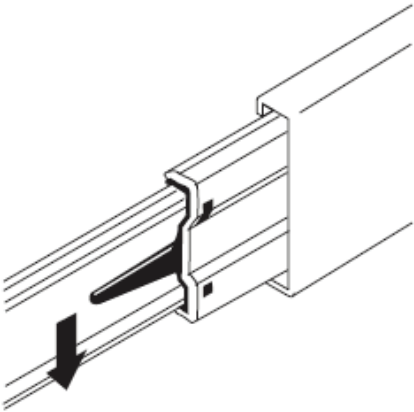


Side mounted

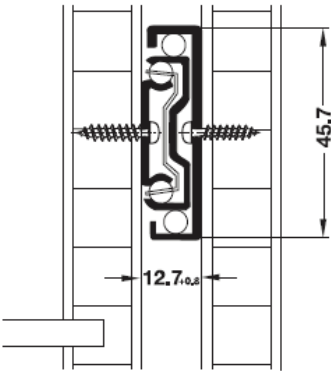

Full-extension ball bearing runners with self-closing and soft-closing mechanism, supporting a load-bearing capacity of up to 35 kg.

Drilling Pattern






Description

Material:	Cold rolled steel
Version:	With integrated soft closing mechanism, cover caps at rear of cabinet rail and center rail with buffer action
Usage:	Drawers, side mount
Mechanism:	Soft close

Item ID No.


Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Black	250	190	Up to 25	BG-400.10.040
	300	275	Up to 25	BG-400.10.041
	350	325	Up to 30	BG-400.10.042
	400	400	Up to 35	BG-400.10.043
	450	450	Up to 35	BG-400.10.044
	500	500	Up to 30	BG-400.10.045
	550	550	Up to 30	BG-400.10.047
Zinc	600	600	Up to 25	BG-400.10.046
	250	190	Up to 25	BG-400.10.270
	300	275	Up to 25	BG-400.10.271
	350	325	Up to 30	BG-400.10.272
	400	400	Up to 35	BG-400.10.273
	450	450	Up to 35	BG-400.10.274
	500	500	Up to 30	BG-400.10.275
	550	550	Up to 30	BG-400.10.276
	600	600	Up to 25	BG-400.10.277

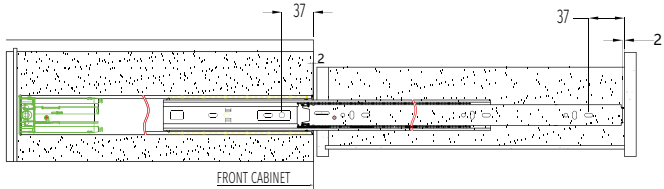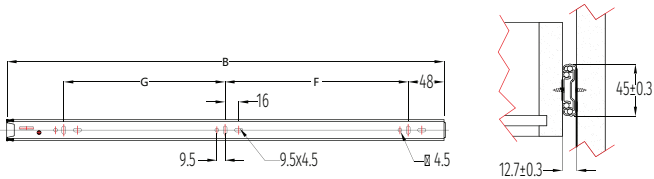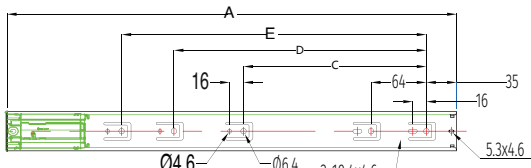

POS	A	TRAVEL 1	B	C	D	E	F	G
1	250	190	246	128	192	288	128	96
2	300	275	296	128	192	288	128	96
3	350	325	346	128	192	288	128	113
4	400	400	396	224	288	384	160	128
5	450	450	446	224	288	384	160	160
6	500	500	496	224	320	416	192	192
7	550	550	546	224	320	416	192	224
8	600	600	596	224	352	416	224	256

Full-extension ball bearing runners with self-closing and soft-closing mechanism, supporting a load-bearing capacity of up to 35 kg.

Application

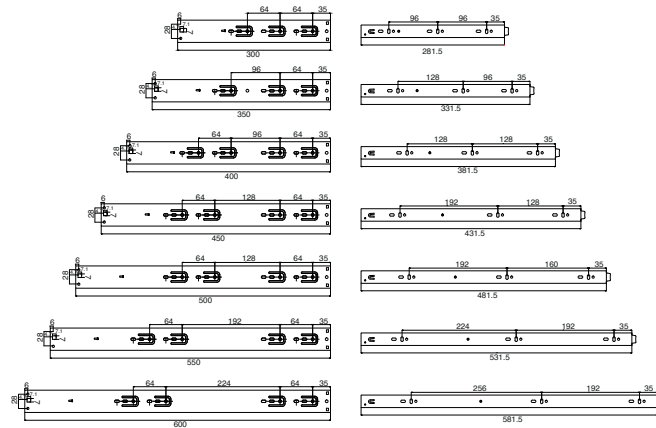

Description


Material:	Steel
Version:	With integrated soft closing mechanism, cover caps at rear of cabinet rail and center rail with buffer action
Usage:	Drawers, side mount
Mechanism:	Soft close

Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Zinc	300	270	Up to 25	BG-401.10.270
	350	334	Up to 30	BG-401.10.271
	400	374	Up to 35	BG-401.10.272
	450	434	Up to 35	BG-401.10.273
	500	484	Up to 30	BG-401.10.274
	550	534	Up to 25	BG-401.10.275
	600	584	Up to 25	BG-401.10.276

Full-extension drawer slides with soft-closing mechanism, supporting a load-bearing capacity of up to 30 kg.

Installation

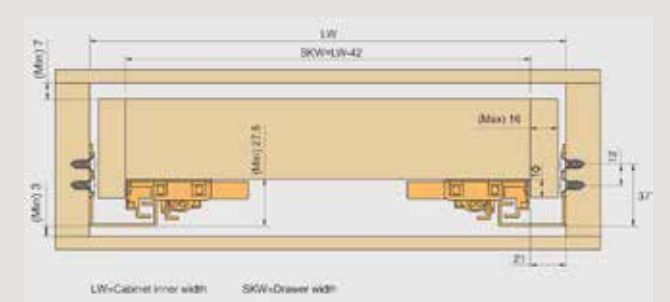





Description

Material:	Steel
Usage:	Drawers, concealed undermount
Mechanism:	Soft close
Type of pull out:	Full extension

Item ID No.

Finish/Colour	Installation length L mm	Load bearing capacity kg	Cat. No.
Galvanized	400	Up to 35	BG-411.03.160
	450	Up to 35	BG-411.03.161
	500	Up to 35	BG-411.03.162


Drilling Pattern

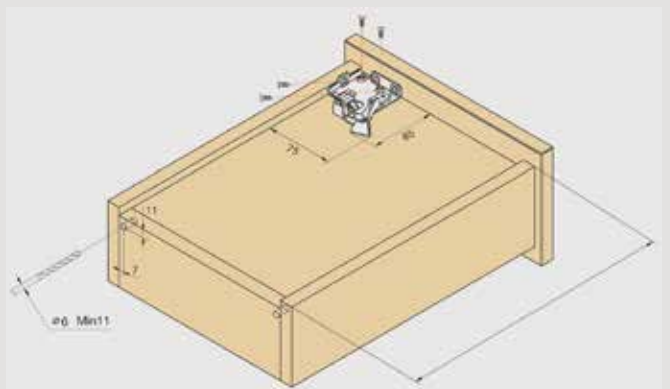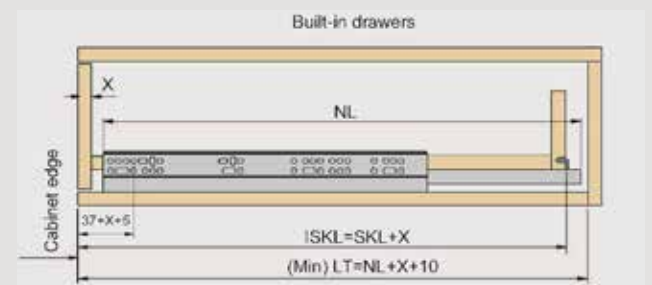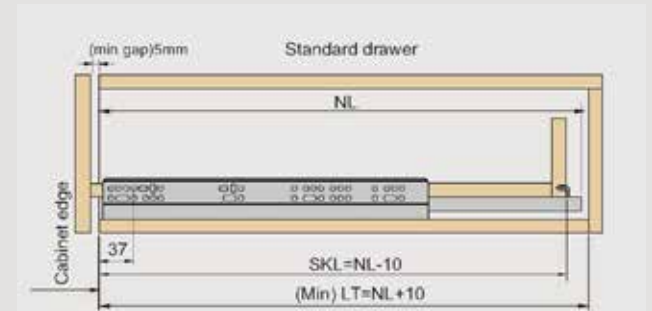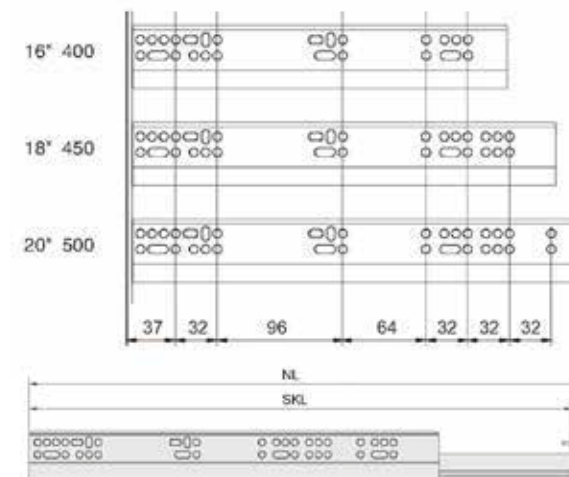



NL = Nominal slide length
LT = Cabinet inner depth
SKL = Drawer length
ISKL = Drawer inner length
X = Drawer panel thickness

Full-extension 2D drawer slides with soft-closing and synchronized mechanism, supporting a load-bearing capacity of up to 35 kg.


Installation





CW= Inside net width
CD= Min cabinet depth
DW= Drawer net width
DL= Drawer Length
NL= Nominal slide length

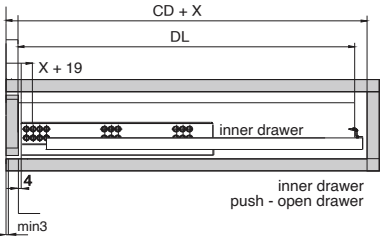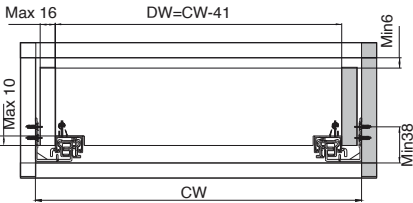

DL=NL-10
CD=NL+5

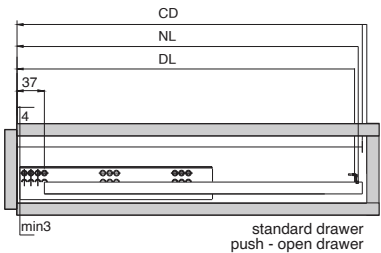

Drilling Pattern

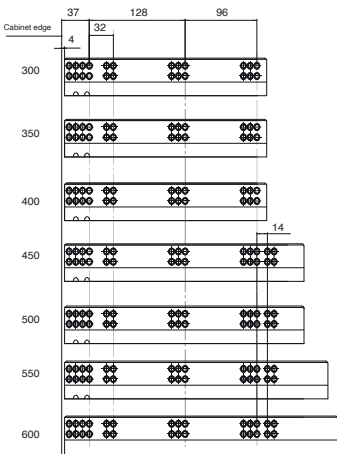


Description

Material:	Steel
Usage:	Drawers, concealed undermount
Panel thickness:	16 mm
Mechanism:	Soft close, synchronized
Type of pull out:	Full extension
Type of the lock:	2D

Item ID No.


Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Galvanized	250	185	up to 30	BG-412.14.167
	300	290	up to 30	BG-412.14.160
	350	340	up to 35	BG-412.14.161
	400	390	up to 35	BG-412.14.162
	450	440	up to 35	BG-412.14.163
	500	490	up to 35	BG-412.14.164
	550	540	up to 35	BG-412.14.165
	600	590	up to 35	BG-412.14.166

Locking Device


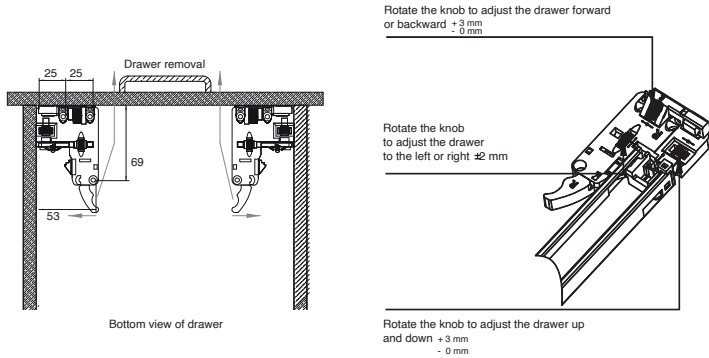


Full-extension 2D drawer slides with soft-closing and synchronized mechanism, supporting a load-bearing capacity of up to 35 kg.


Installation





CW= Inside net width
CD= Min cabinet depth
DW= Drawer net width
DL= Drawer Length
NL= Nominal slide length

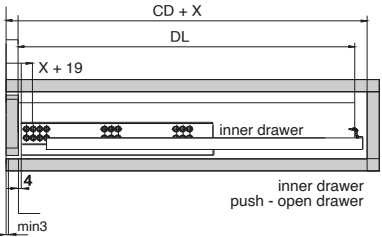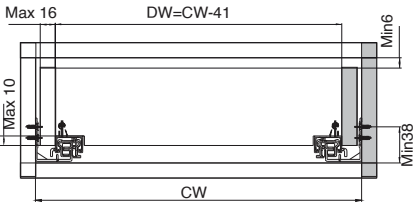

DL=NL-10
CD=NL+5

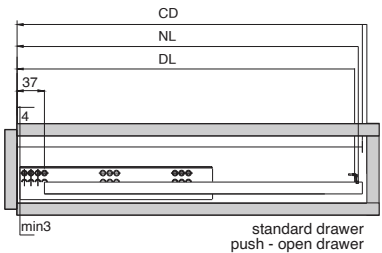

Drilling Pattern

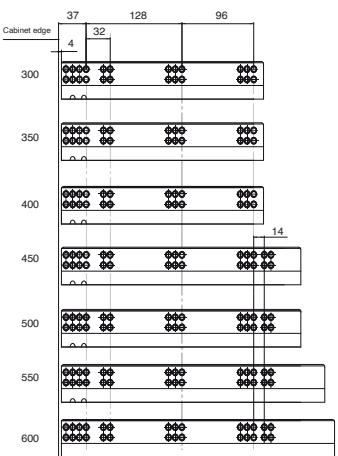


Description

Material:	Steel
Usage:	Drawers, concealed undermount
Panel Thickness:	18 mm
Mechanism:	Soft close, synchronized
Type of pull out:	Full extension
Type of the lock:	2D

Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Galvanized	250	185	up to 30	BG-413.14.160
	300	290	up to 30	BG-413.14.161
	350	340	up to 35	BG-413.14.162
	400	390	up to 35	BG-413.14.163
	450	440	up to 35	BG-413.14.164
	500	490	up to 35	BG-413.14.165
	550	540	up to 35	BG-413.14.166
	600	590	up to 35	BG-413.14.167

Locking Device

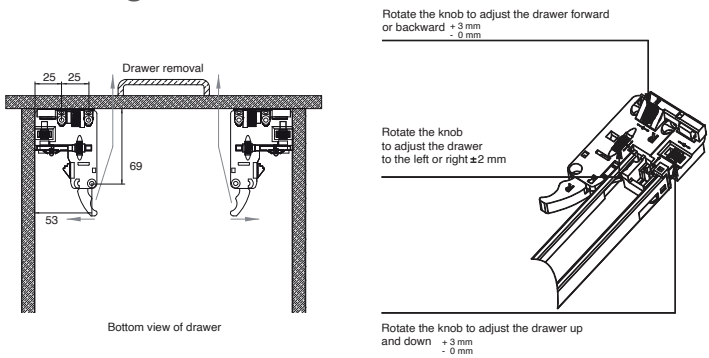

Full-extension 2D drawer runners featuring push-to-open and soft-closing functionality. Includes a synchronised mechanism with a load-bearing capacity of up to 35kg.




Description

Material:	Steel
Usage:	Drawers, concealed undermount
Panel Thickness:	18 mm
Mechanism:	Soft close, synchronized, push-to-open
Type of pull out:	Full extension
Type of the lock:	2D


Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Galvanized	250	185	up to 30	BG-414.14.160
	300	290	up to 30	BG-414.14.161
	350	340	up to 35	BG-414.14.162
	400	390	up to 35	BG-414.14.163
	450	440	up to 35	BG-414.14.164
	500	490	up to 35	BG-414.14.165
	550	540	up to 35	BG-414.14.166
	600	590	up to 35	BG-414.14.167


Locking Device

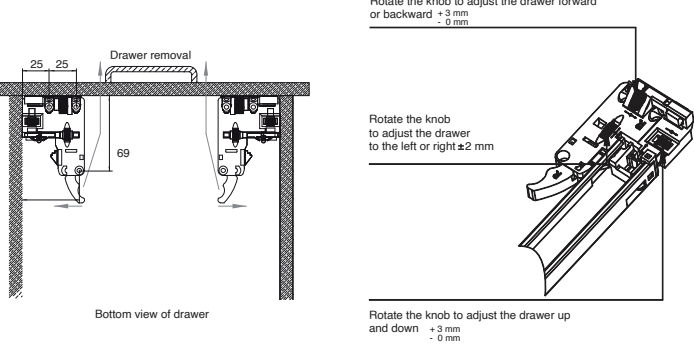

Installation

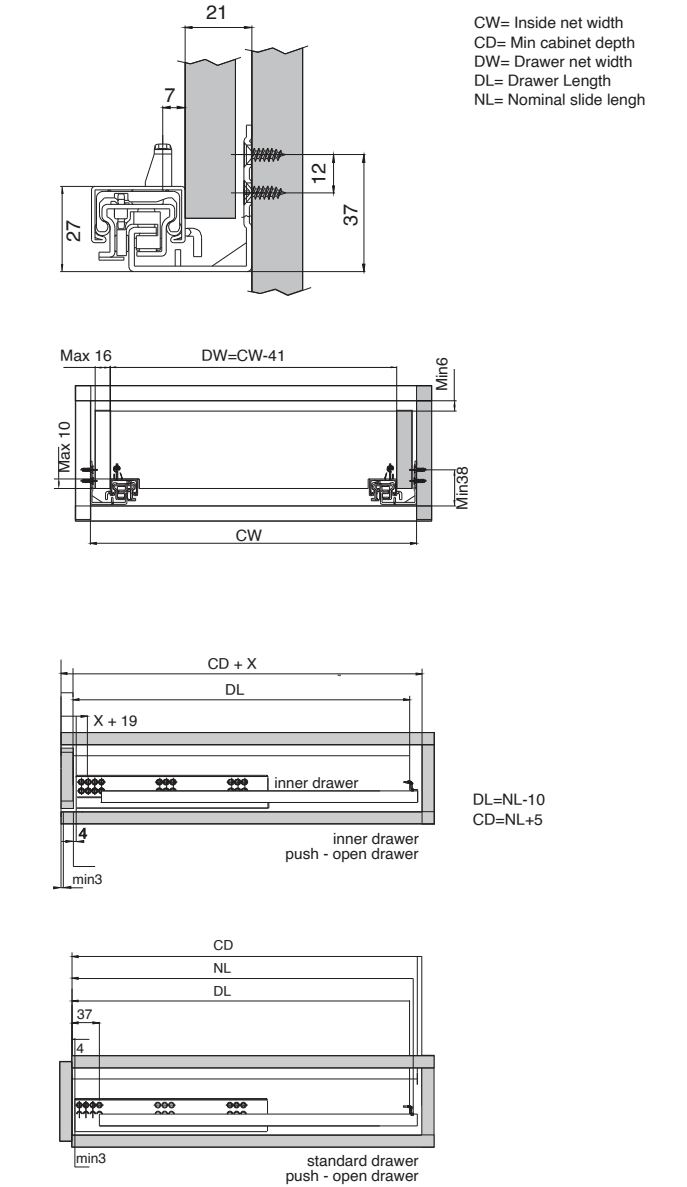

Drilling Pattern

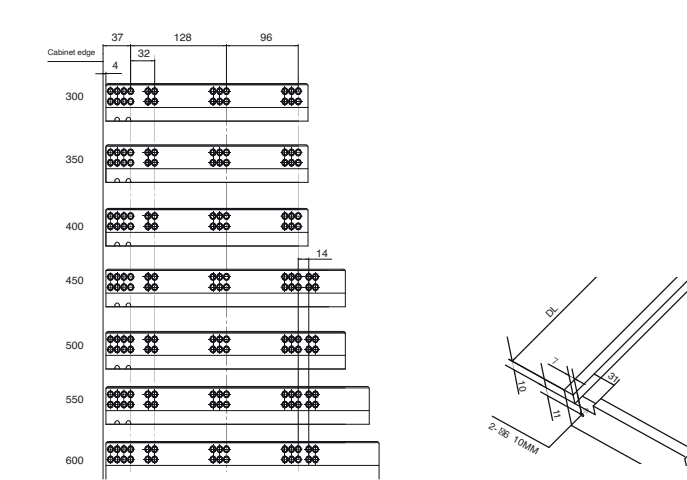

Totally practical, the TandemPlus runners offer an affordable solution coupled with silence, smooth running and ease of use. The synchronised opening action of this drawer is supremely comfortable.





Description

Material:	Steel
Mechanism:	Intergrated soft close with stabilisers
Adjustment:	Front: 2 dimensional Horizontally ± 1 mm Vertically ± 2 mm
Height:	86 mm

Item ID No.

Finish/Colour	Installation length L mm	Load bearing capacity kg	Cat. No.
White	500	up to 35	BG-500.03.020
Silver metallic	500	up to 35	BG-500.03.070

Mounting without rail extension

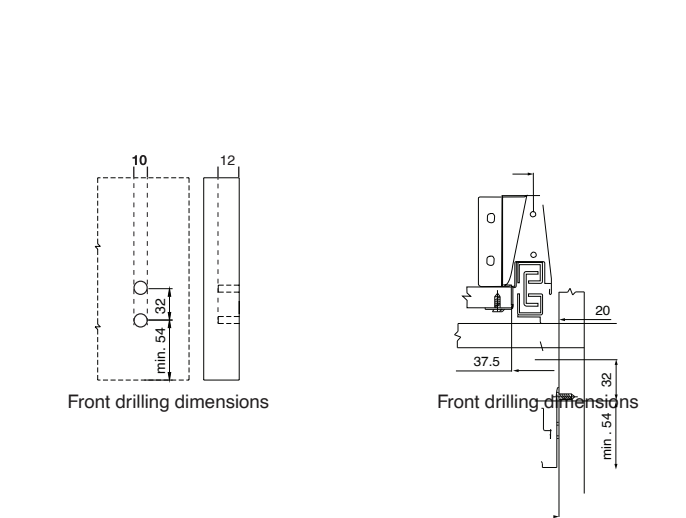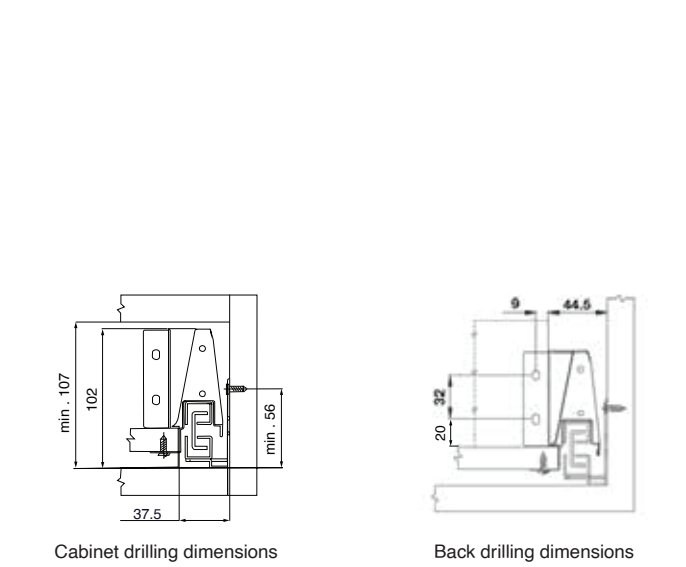

Totally practical, the TandemPlus runners offer an affordable solution coupled with silence, smooth running and ease of use. The synchronised opening action of this drawer is supremely comfortable.






Description

Material:	Steel
Mechanism:	Full extension, soft close with stabilisers
Adjustment:	Front: 2 dimensional Horizontally ± 1.5 mm Vertically ± 2 mm
Height:	84 mm


Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Taupe grey	400	370	up to 35	BG-502.14.421
	450	420	up to 35	BG-502.14.422
	500	470	up to 35	BG-502.14.420


Mounting without rail extension

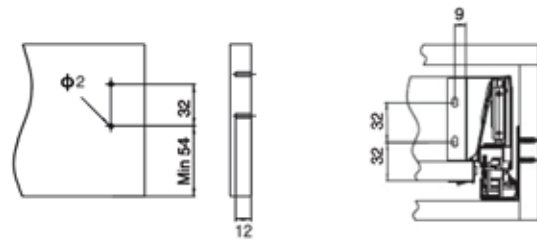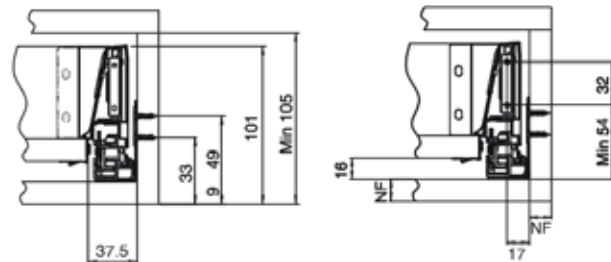


Screw positioning

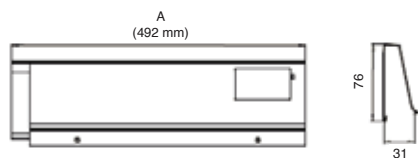

Length (mm)	
NL	500
A	492



Totally practical, the TandemPlus runners offer an affordable solution coupled with silence, smooth running and ease of use. The synchronised opening action of this drawer is supremely comfortable.




Description

Material:	Steel
Mechanism:	Full extension, soft close with stabilisers
Adjustment:	Front: 2 dimensional Horizontally ± 1.5 mm Vertically ± 2 mm
Height:	167 mm



Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Taupe grey	400	370	Up to 35	BG-504.14.420
	450	420	Up to 35	BG-504.14.421
	500	470	Up to 35	BG-504.14.422

Mounting with rail extension

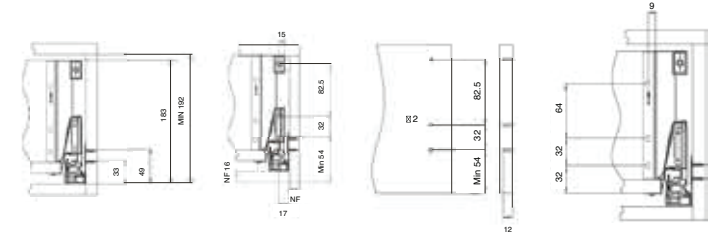

Screw positioning

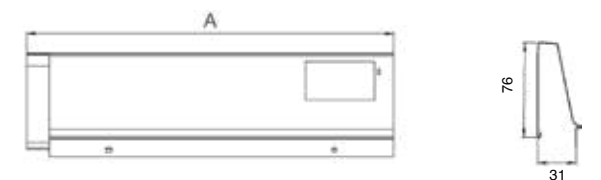

Totally practical, the TandemPlus runners offer an affordable solution coupled with silence, smooth running and ease of use. The synchronised opening action of this drawer is supremely comfortable.






Description

Material:	Steel
Mechanism:	Full extension, soft close with stabilisers
Adjustment:	Front: 2 dimensional Horizontally ± 1.5 mm Vertically ± 2 mm
Height:	199 mm



Item ID No.

Finish/Colour	Installation length L mm	Extension length AL mm	Load bearing capacity kg	Cat. No.
Taupe grey	400	370	Up to 35	BG-505.14.421
	450	420	Up to 35	BG-505.14.422
	500	470	Up to 35	BG-505.14.420
White	400	370	Up to 35	BG-505.14.021
	450	420	Up to 35	BG-505.14.022
	500	470	Up to 35	BG-505.14.020


Mounting with rail extension

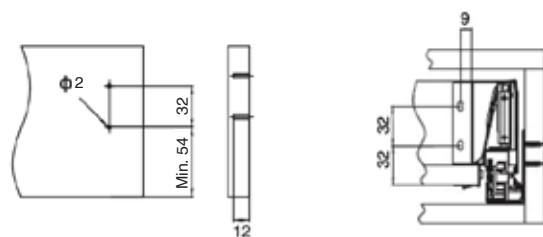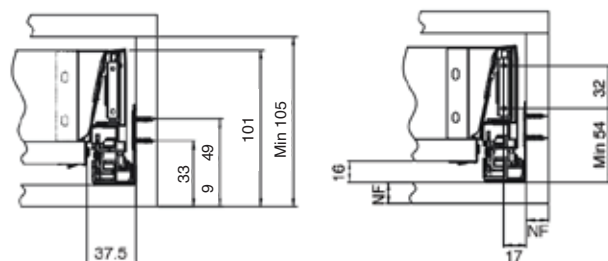

Screw positioning

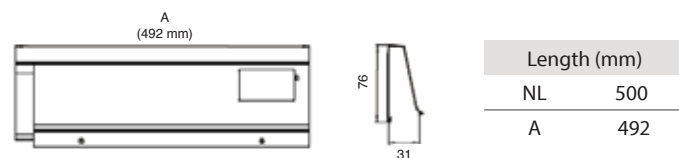

Totally practical, the TandemPlus runners offer an affordable solution coupled with silence, smooth running and ease of use. The synchronised opening action of this drawer is supremely comfortable.

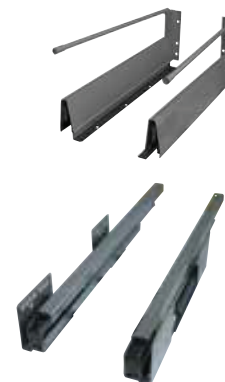


Description


Material:	Steel
Mechanism:	Integrated soft close with stabilisers
Adjustment:	Front: 2 dimensional, also tilt for drawer front adjustment with railing system Horizontally ± 1 mm Vertically ± 2 mm
Height:	164 mm

Item ID No.


Finish/Colour	Installation length L mm	Load bearing capacity kg	Cat. No.
Silver metallic	400	Up to 35	BG-510.03.070
	500	Up to 35	BG-510.03.071

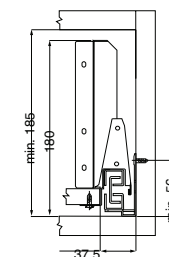


Cabinet drilling dimensions



Back drilling dimensions



Front drilling dimensions



Front drilling dimensions



Fixing Accessories & Other


37	Beech Wooden-Dowel
38	Shelf Support-For Glass
39	Shelf Support-For Wood
40	Shelf Support-For Wood
41	Thread Sleeve-With Screw
42	Thread Sleeve-With Screw
43	Spreading Bolt-For Wood
44	Connecting Bolt-For Wood
45	Connecting Housing-For Wood
46	Spreading Dowel-For Wood
47	Connector Housing With Bolt-For Wood
48	Push-to-Open Door Catch-With Counterplate
49	Push-to-Open Door Catch-With Counterplate
50	Push-to-Open Door Catch-Insert Type
51	Cabinet Hanger-For Kitchen Cabinets
52	Base Cabinet Leg-With Leg Adjuster
53	Cabinet Feet-Adjustable

The quickest method for assembling wooden panels and solid wood reliably and securely.They are very commonly used in furniture making and construction.Made from dried beech wood. Its two chamfered ends perfectly fit into corresponding holes of two workpieces that are to be joined and, in combination with glue it provides a strong and durable connection.



Description

Material:	Beech
Species:	Fagus sylvatica
Tolerance:	Pins have ±0.1 mm of tolerance in both length and diameter

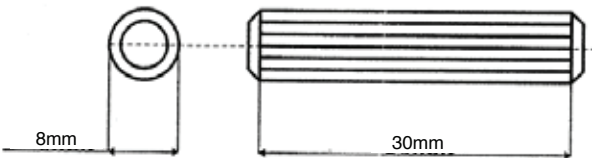

°45 chamfered ends
for easier insertion

Item ID No.

Dims.	Cat. No.
Ø8x30 mm	BG-220.06.060



Quality
Made in Italy




Environmental friendly
- from an FSC source

Reliable and practical glass suction cup shelf support pin, used for glass shelves.



Description

Material:	Iron & PVC
-----------	------------




Ø	L	L1
5	7.5	13.5

Item ID No.


Finish/Colour	Cat. No.
Transparent	BG-221.01.010

Wood shelf brackets with pin, no screws needed with a wide scope of application.



Description


Material:	Iron & plastic
-----------	----------------



Item ID No.


Finish/Colour	Cat. No.
Nickel plated	BG-222.01.050

Wood shelf brackets with pin, no screws needed with a wide scope of application.

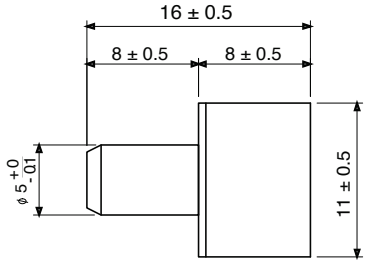


Description

Material:	Iron & ABS
Pin dia.:	5 mm
Pin length:	8 mm +/- 0.5 mm
Support length:	8 mm +/- 0.5 mm

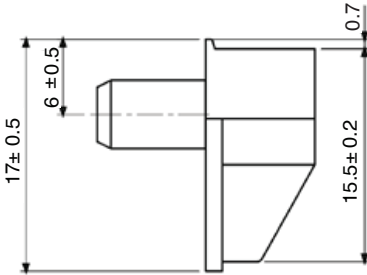


Item ID No.

Finish/Colour	Cat. No.
Transparent	BG-222.13.010

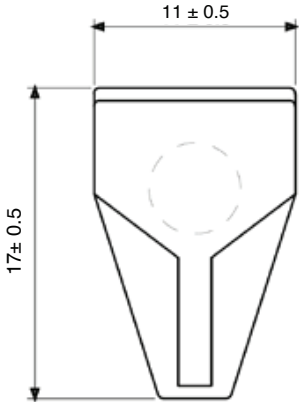

The Bergo connector screws come in a set, providing a secure connection for furniture to enhance stability and safety.

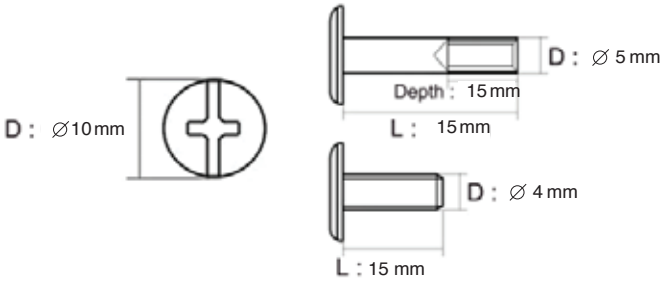


Description

Material:	Iron
Connector thread sleeve	
Length:	35 mm
Dia.:	Ø 5 mm
Wood thickness:	37-45 mm
M4 thread screw	
Thread:	Ø M4
Head:	Ø 10 mm
Length:	15 mm

Item ID No.


Finish/Colour	Cat. No.
Nickel plated	BG-223.01.050

The Bergo connector screws come in a set, providing a secure connection for furniture to enhance stability and safety.

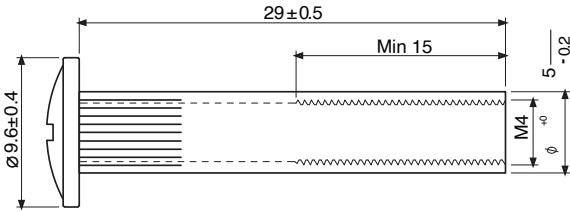

Description



Material:	Iron
Connector thread sleeve	
Length:	29 mm +/- 0.5 mm
Dia.:	Ø 5 mm
M4 thread screw	
Length:	15 mm ± 0.5 mm

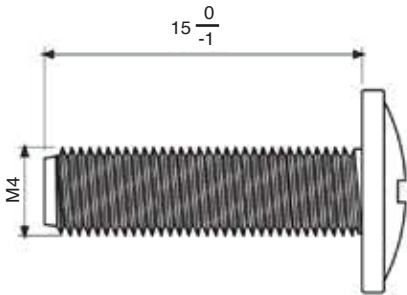

Item ID No.

Finish/Colour	Cat. No.
Nickel plated	BG-223.13.050



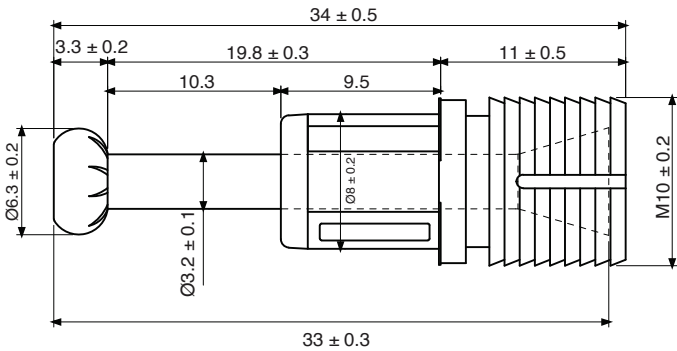

Description

Material:	Iron & ABS
Length:	24 mm +/- 0.5 mm
Dia.:	10 mm +/- 0.3 mm

Item ID No.

Finish/Colour	Cat. No.
White zinc	BG-224.13.270





Description

Material:	Iron & ABS
Length:	40 mm +/- 0.5 mm
Width:	7.5 mm +/- 0.2 mm

Item ID No.


Finish/Colour	Cat. No.
White zinc	BG-225.13.270

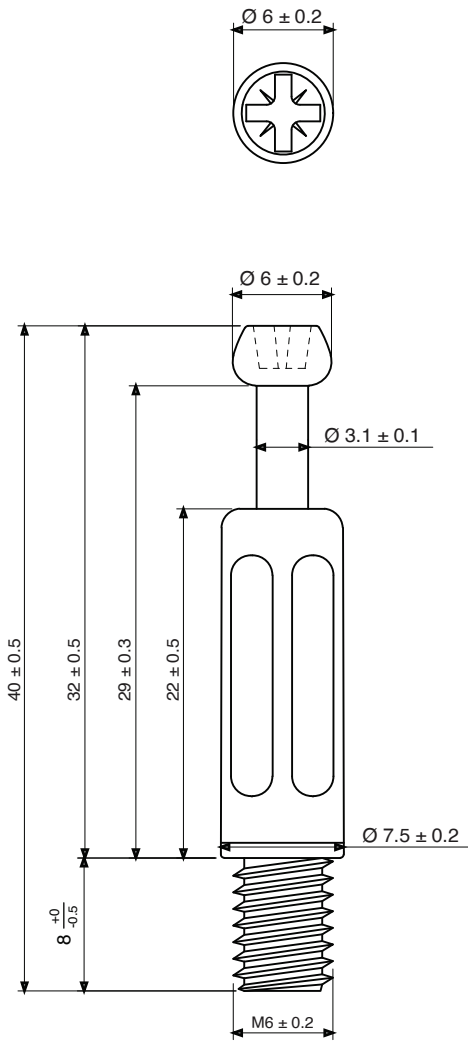

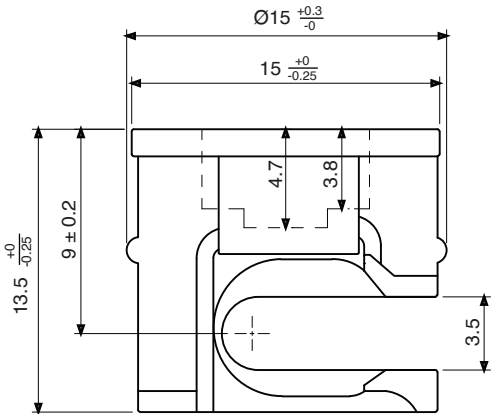


Description

Material:	Zinc alloy
Dia.:	Ø 15 mm
Depth:	13.5 mm +/- 0.25 mm

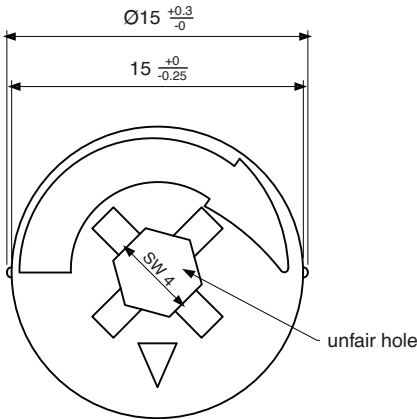


Item ID No.

Finish/Colour	Cat. No.
Nickel plated	BG-226.13.050




Description

Material:	PA
Length:	11 mm +/- 0.2 mm
Drill hole:	Ø 10 mm +/- 0.2 mm
Internal thread:	M6

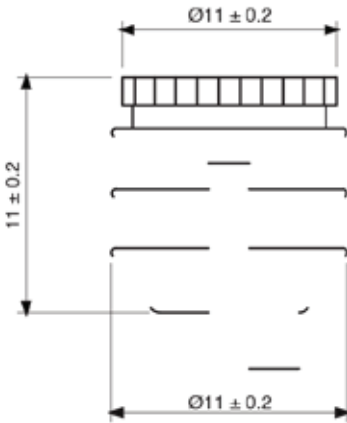

Item ID No.

Finish/Colour	Cat. No.
Natural	BG-227.13.410

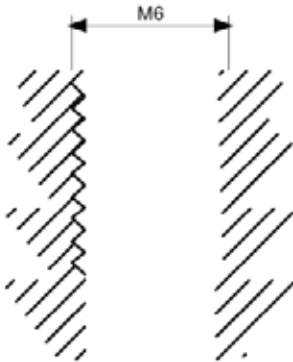







Description

Material:	Iron, zinc alloy & ABS
Connector housing	
Size:	22 mm x 20 mm
Depth:	12.5 mm +/- 0.5 mm
Bolt	
Dia.:	Ø 6 mm
Length:	16 mm +/- 0.6 mm

Item ID No.

Finish/Colour	Cat. No.
White	BG-228.13.020
Brown	BG-228.13.060

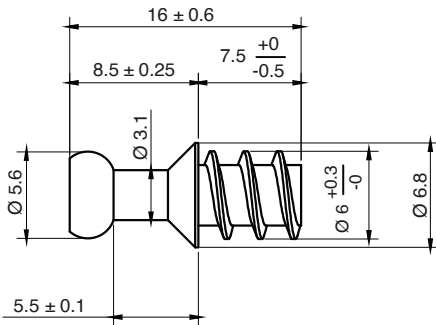

The push catch with magnet is a mechanical opening aid for holding the doors in closed position, with adjustable magnetic tip

Installation






Description

Material:	Plastic
Usage:	Furniture with wood doors
Size:	81.5 x 14 x 17 mm
Drill hole:	4 mm
Release distance:	38 mm
Latch:	Magnet

Item ID No.


Finish/Colour	Cat. No.
White	BG-300.01.020

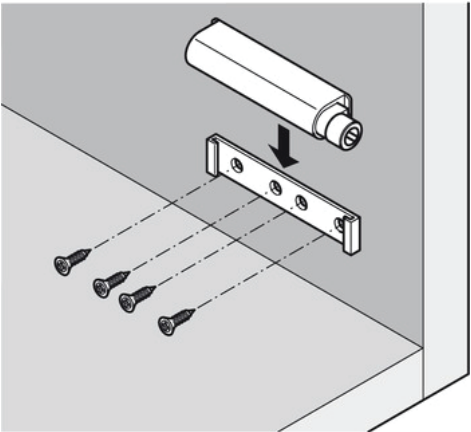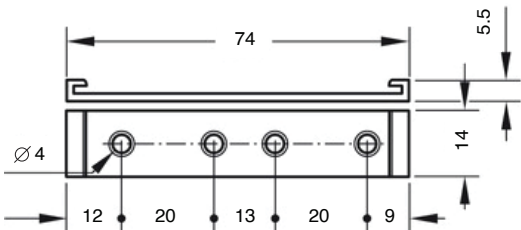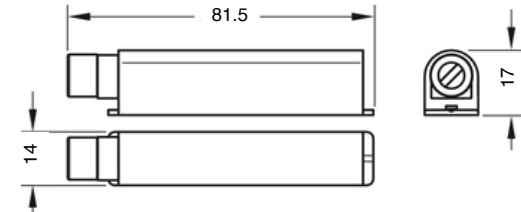

For screw Fixing
to the inner side of the cabinet



The adhesive rebound push to open door catch with magnet is a mechanical opening aid for holding the doors in closed position, with adjustable magnetic tip.

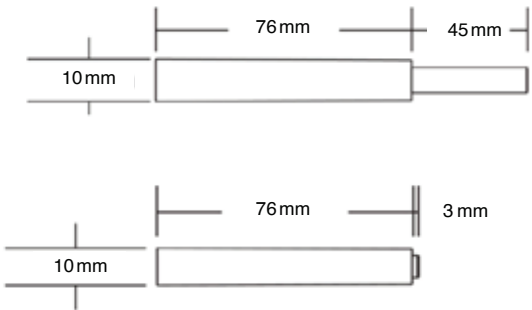


Description

Material:	Plastic
Usage:	Furniture with wood doors
Size:	79 x 10 x 12 mm
Drill hole:	3 mm
Release distance:	45 mm
Latch:	Magnet

Item ID No.

Finish/Colour	Cat. No.
Grey	BG-301.01.030
Black	BG-301.01.040

The adhesive rebound push to open door catch with magnet is a mechanical opening aid for holding the doors in close position, with adjustable magnetic tip.

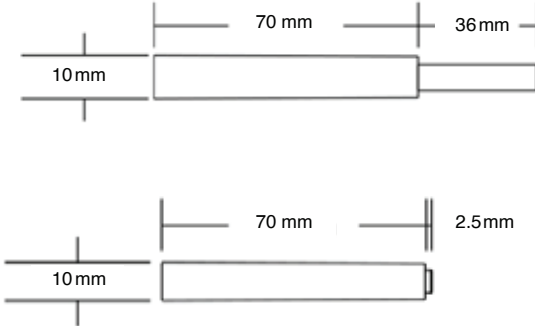

Description

Material:	Plastic
Usage:	Furniture with wood doors
Size:	72.5 x 10 x 10 mm
Latch:	Magnet

Item ID No.

Finish/Colour	Cat. No.
Grey	BG-302.01.030
Black	BG-302.01.040

Concealed kitchen cabinet hanger with white plastic cover.



Description

Material:	Steel & plastic covers
Size:	86 x 4.4 mm




Item ID No.

Finish/Colour	Load bearing capacity kg	Cat. No.
White	Up to 100	BG-310.01.020


The Bergo base cabinet leg is a component of a comprehensive system designed for cabinets. Its legs are constructed from a thermoplastic material that offers high shock resistance, excellent dimensional stability, and long-lasting durability.

Assembly Specifications

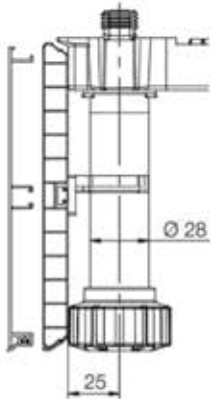

Description



Material:	PVC
Specifications:	Thermoplastic shock-proof material. High dimensional stability and inalterability in time. Strong chemical and mechanical resistance.

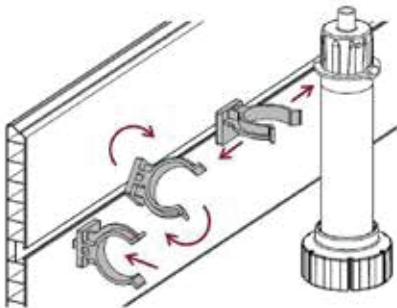

Item ID No.

Item	Finish/Colour	Length mm	Cat. No.
PVC leg	Black	100	BG-600.02.040
		150	BG-600.02.041
Leg Adjuster	Black	-	BG-601.02.040

Bergo adjustable feet are components of a comprehensive system designed for cabinets. They are constructed from a thermoplastic material that offers high shock resistance, excellent dimensional stability & long-lasting durability. They also provide strong mechanical and chemical resistance.

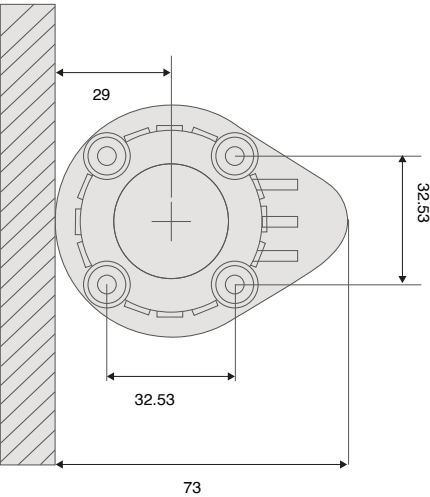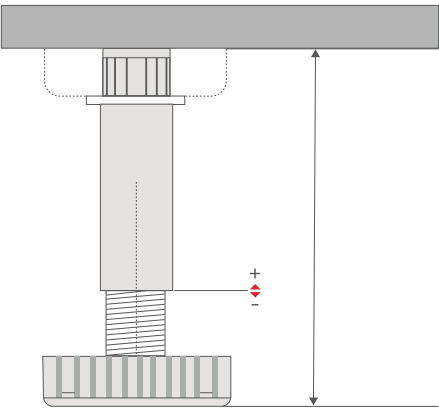

Description

Material:	PP
Specifications:	Adjustable height. Reduces the wear and tear between the furniture and the ground

Item ID No.

Finish/Colour	Adjustable height mm	Cat. No.
Black	80-100	BG-602.01.040
	120-150	BG-602.01.041
	100-130	BG-602.01.042
	140-180	BG-602.01.043



Get in touch **with us.**

Regional Offices:

Warehouse L12, Phase 1, Dubai Industrial City, Dubai, UAE

☎ +971 4 564 2460 (landline) / 📞 +971 56 539 2001 (Mobile)

info@bergopro.com

www.bergopro.com

For International Enquiries:

info@bergopro.co.uk

www.bergopro.co.uk

Photographs and images in the catalogue
will differ slightly from the actual items.

**For exact colours, grains, and textures,
kindly contact us for samples.**

BERGO® 