

Solas wireless asynchronous monochrome control box. Programmable individual channels enhancing the customizability of your LED system.





Wireless features

Frequency:	ISM 2405 - 2485 MHz
Crystal frequency:	24 MHz
Modulation:	GFSK
Transmit power:	0 dbm
TIS:	-70 dbm
Emission:	16 mA (0 dbm)

Description

Finish/colour:	Black
Usage:	BG-872.08.XX.04 required
Input/Output voltage:	12/24 V _{DC}
Input/Output variation range:	11.4/25.2 V _{DC}
Input/Output current:	5 A
PWM frequency:	1 KHz
Minimum brightness:	5% Duty
Soft on/off:	2S +/- 20%
Dimming:	5S +/- 20%

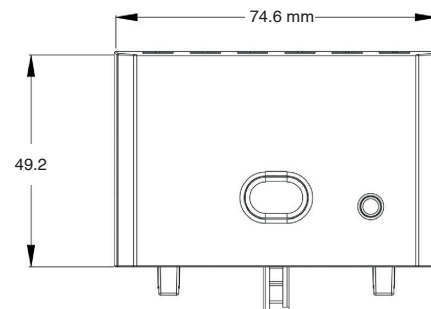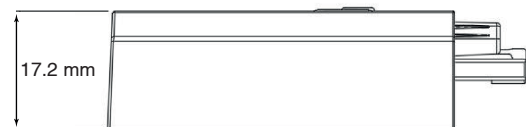

Environmental conditions

Operating temperature range:	-10° C ~ +45° C
Storage temperature range:	-20° C ~ +70° C
Operating humidity:	5 ~ 95%

Item ID No.

Item	Cat. No.
Wireless Asynchronous Monochrome LED Driver Control Box	BG-881.08.001.04A

